



JOB-MANN®

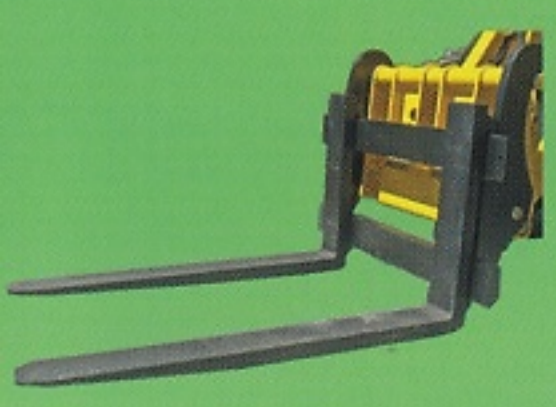

JOB-MANN		JM 101-30 WL	JM 202-35 WL	JM 255-35 CWL	JM 303-50 WL	JM 355-50 CWL	JM 404-50 WL	JM 455-50 CWL
A	Wheelbase	mm	1.326	1.509	1.509	1.733	2.020	2.020
B	Overall length without shovel	mm	2580	3.079	3.079	3.695	4.120	4.120
C	Overall length with standard shovel	mm	3.538	4.142	4.142	4.620	4.960	4.960
D	Lifting height	mm	2.771	2.844	2.844	3.265	3.230	3.230
E	Total width	mm	930-1.060	1.080-1.310	1.080-1.310	1.120-1.350	1.420	1.420
F	Ground clearance	mm	188	238	238	290	295	295
G	Rear overhang	mm	776	1.048	1.048	1.195	1.290	1.290
H	Radius at outer edge	mm	2.175	2.408	2.408	2.984	3.510	3.510
I	Maximum turning radius	mm	1.655	1.932	1.932	2.535	3.225	3.225
J	Inside turning radius	mm	654	860	860	1.247	1.751	1.751
K	Total working height	mm	3.254	3.631	3.631	4.062	3.910	3.910
L	Max. dumping height	mm	1.860	1.936	1.936	2.530	2.450	2.450
M	Height to ROPS bar	mm	2.304-1.894	2.280-1.805	2.280 (cabin)	2.249-1.841	2.290 (cabin)	2.360-1.805
	Bucket volume	m ³	0,25	0,3	0,3	0,30-0,59	0,30-0,59	0,30-0,59
	Tipping load, straight	kg	790	1.270	1.550	1.730	2.148	2.605
	Tipping load, articulated	kg	490	840	1.175	1.380	1.733	2.138
	Tipping load w/pallet fork, straight	kg	520	990	1.220	1.410	1.960	2.130
	Tipping load w/pallet fork, articulated	kg	300	650	990	1.130	1.622	1.794
	Operating weight	kg	1.360	2.220	2.560	2.780	2.985	3.180
	Net power	kW (PS)	18,5 (27)	24,7 (35)	24,7 (35)	35,7 (50)	35,7 (50)	35,7 (50)
	Displacement	cm ³	1.131	1.508	1.508	2.216	2.216	2.216
	Tires, standard		27x8.50-15	27x10.50-15	27x10.50-15	12x16,5	12x16,5	12x16,5
	Option wide tires		26x12.00-12	31x15.50-15	31x15.50-15	31x15.50-15	31x15.50-15	15.0/55-17
	Travel speed	km/h	0-13	0-20	0-20	0-20	0-25	0-25
	Hydraulic tank	l	26,5	28,5	28,5	30	30	50
	Auxiliary hydraulic	l/min	33	48	48	50	50	71
	Fuel tank	l	20	47	47	69	69	69

Specifications and poss. misprints are subject to change without notice.

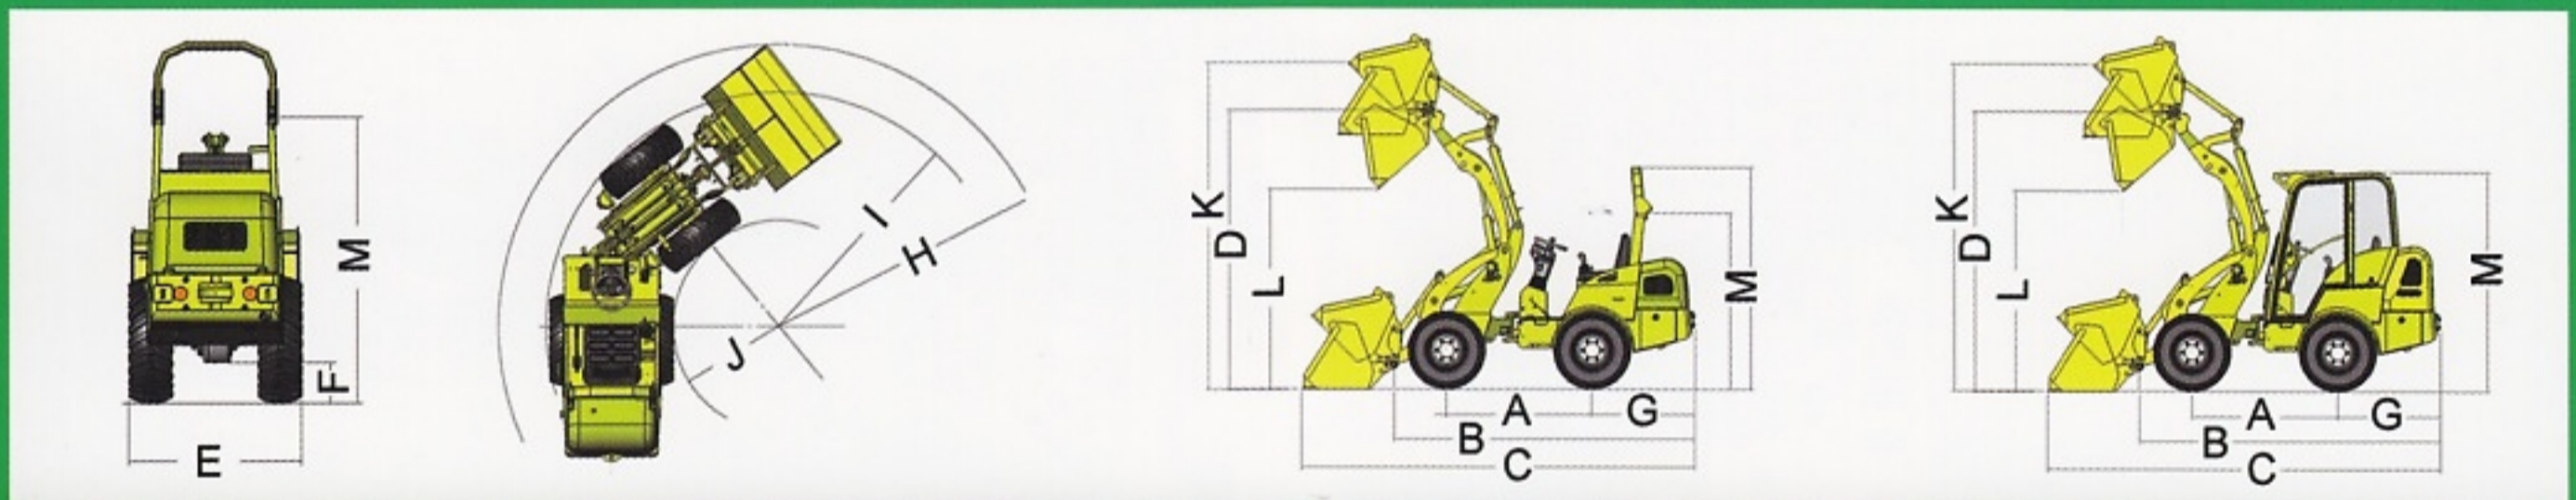

High lifting force

- Perkins diesel engine
- Danfoss hydraulic
- Hero Time Axles
- No maintenance on brakes
- Handbrake works on all 4 wheels
- 100% differential lock on front and rear axle, electronic connection (JM 202-355)

Powerful hydraulic

- Joystick control
- Standard auxiliary hydraulic (1 output)
- Furthermore auxiliary hydraulic (2 output) from JM 202
- Oil cooler
- Hydraulic quick hitch

Robust construction

- Folded ROPS bar
- Seat with suspension and seatbelt
- Working lights on front and rear end
- Fuel gauge and hour meter
- Various attachments for different tasks

Service

- Easy maintenance with tilted cabin

